SAMSUNG

Samsung Interactive Pro WMB Flip Pro Series

Interactive brilliance. Inspired classroom learning.



Bring inspired learning to life


What is Samsung Interactive Pro?

Introducing Samsung Interactive Pro, the premium interactive display that brings inspired learning to life. With intuitive writing, comprehensive connectivity, smart solutions and brilliant hardware, Samsung Interactive Pro provides both educators and students with boundless resources and great flexibility to create engaging learning. Experience unlimited learning possibilities with Samsung Interactive Pro.

Technology highlights



Touch & Writing

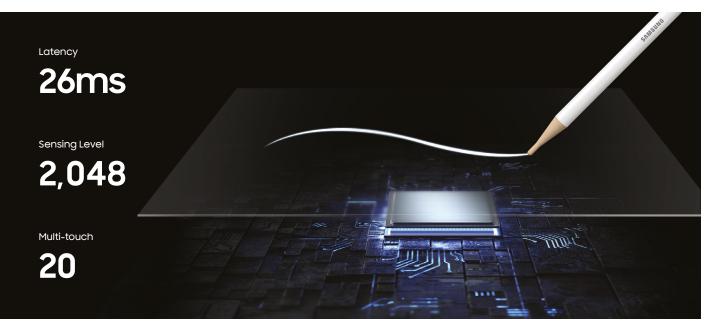


Fast & multi-touch

Better interaction with exceptionally responsive multi-touch

Samsung Interactive Pro creates a realistic, smooth writing and drawing experience with touch technology boasting 26ms* latency and 2,048 points of pressure built directly into the display. Industry-best touch latency was achieved by Samsung's proprietary prediction logic which analyzes user's writing patterns. Plus, Interactive Pro enables multi-touch for up to 20 people for enhanced interactivity.

* When using single touch.

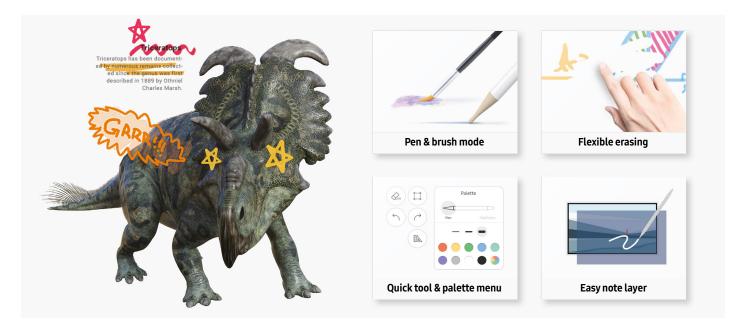

Intuitive writing & drawing

Bring ideas to life in an instant


Ideas are brought to life instantly on Interactive Pro with an intuitive user interface. Interactive Pro's unique pen and brush mode provides a real-world writing experience with various options, while flexible erasing requires just a swipe of your finger or palm. The quick tool and palette menu ensure creativity flows and toggle button easily enables a new note layer UI.



Seemless connectivity

Stay connected from any source


Interactive Pro provides multiple connectivity options, including USB, HDMI, DP and OPS slot. Educators can easily connect any device to access content and display information on a larger screen, as well as connect to any network and other devices through LAN port and wireless screen-mirroring.

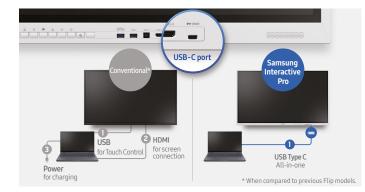

3-in-1 USB-C port

One single port for three functions

Connectivity is enhanced with three-in-one USB Type-C connectivity, enabling screen mirroring, touch control and external device charging (max. 65W), allowing educators to deliver interactive and engaging lessons without any hassle.

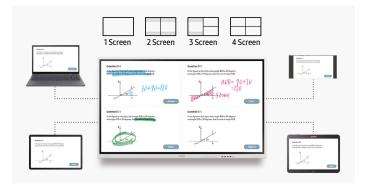

SmartView+

Smart, wireless sharing from multiple devices

With SmartView+, up to 50 devices can be simultaneously connected to the interactive display wirelessly, in addition to enabling multi-view on up to four screens, ideal for larger meeting rooms as well as digitized classrooms.



AirPlay 2 Share with AirPlay 2

Interactive Pro is integrated with AirPlay 2, allowing educators and students to present on the big screen, increasing visibility and engagement in larger spaces, while ensuring no student misses out on important information.

* All images are simulated for illustrative purposes. Actual UI may be different.



OPS Slot

Use your favorite third-party education solutions

With OPS (Open Pluggable Specification) slot*, Interactive Pro enables educators to use their third-party education solutions, allowing them to deploy school information systems (SIS), learning apps and tools.

* Sold separately.

Solutions to spark new thinking



Workspace

Access whatever you need, from anywhere

With Workspace secured by Knox, Interactive Pro enables users to easily access remote PC, network drive and other third-party applications such as Office 365, VMWare, MimioComnnect Blended Learning Platform and video call applications*. This ensures efficiency from any location and an uninterrupted workflow for educators and students.

* Available apps may vary by region and require service subscription.



MimioConnect Blended Learning Platform

Optimize lesson planning with embedded learning solution

Interactive Pro offers the MimioConnect* app, an online blended learning platform, providing an extensive catalog of versatile learning content.

* Service availability varies by region and requires Boxlight subscription.




Video call application

Engage students wherever they are

Video conferencing* is supported on Interactive Pro based on the WebRTC (Real Time Communication) API, supporting apps such as Google Duo without the need for additional solution compatibility.

* Video call application will be available through a firmware update available Q2 2022. Webcam must be purchased separately.
** Supported webcam (9 models): Logitech C930e, C922, C922x, C925E, C920s, C920, C920-CC930C, Logitech Stream Cam.

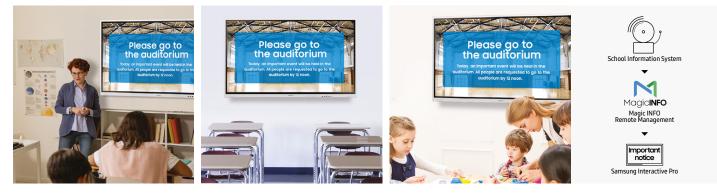


Remote content push

Keep informed with remote management solution

Using Samsung's MagicINFO Remote Management solution, Interactive Pro offers new functionality that pushes content, alerts a nd warnings from the school information system to the display, notifying teachers and students of important updates which can be pushed directly to Interactive displays in every classroom.

* Requires MagicINFO license to use this service and SIS(School Information Service) should separately built and integrated with MagicINFO.

Hardware designed to educate

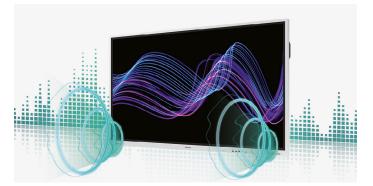

4.0Ch. 40W speaker

Engage learners with immersive sound

Interactive Pro offers powerful 4-channel 40-watt speakers front and backside to enhance students' listening experience, so they are more immersed in content when both watching and listening.



Ambient light sensor Enjoy optimal content in any lighting conditions

The screen of Interactive Pro is equipped with an ambient light sensor to adjust the brightness according to lighting conditions. Whether the classroom is bright or dark, content can be enjoyed to the fullest.



Front panel

Access frequently used menu directly

Use functions and hotkeys faster and easier. Interactive Pro puts the buttons that users most frequently use on the front panel so they can access more easily and intuitively.



Rear handle

Easy moving. Less effort.

Move the Interactive Pro display freely anywhere in the classroom. The rear handle helps teachers move the large display easily with little effort.

* Requires separate standing mount to move which must be purchased separately.



Protective screen technology

Clean screen and minimized damage risk

Samsung Interactive Pro delivers peace of mind with a built-in Antimicrobial Coating which inhibits microbial growth. Plus, the Interactive Pro's display is wrapped in a proprietary shatterproof film, ensuring the screen stays intact in the event of a break.

* Antibacterial certification: UL2282 which is granted when the antibacterial effectiveness is more than 99%. (Test method(JIS Z 2801): after inoculation of 0.4cc of liquid with bacteria (Escherichia coli and Staphylococcus aureus) on specimen(5cm x 5cm), a sterilized film (4cm x 4cm) is adhered and left in a thermo-hygrostat with a relative humidity of 90% or more at 35°C for 24 hours, and then the efficiency of killing of the bacteria is measured / Test agency: KOTITI Testing & Research Institute)

^{*} To perform its antibacterial function, this product has been treated with the biocidal substance Silver phosphate glass.

^{*} Antibacterial property does not protect users against bacteria and provides no protection against viruses including Covid-19.

^{*} Antimicrobial Coating is on surface of screen only and the effect may vary depending on conditions of use.

Specifications

No. No. No.		Model		Interactive Pro (WMB Flip Pro Series)		
Image: mage:						
Best 3.887.200 (Leptang Jung) 3.887.200 (Leptang Jung) 3.887.200 (Leptang Jung) 						
Burger Bits data duting juid Subscription Consent staticity 4.001 1.0001 1.0001 South Consent staticity 4.001 1.0001 South Consent staticity 1.0001 1.0001 South South Consent staticity 1.0001 South South 1.0001 1.0001 1.0001 South South South 1.0001 1.0001 1.0001 South South South South 1.0001 1.0001 1.0001 1.0001 1.0001 1.0001 1.0001 1.0001 1.0001 1.0001 1.00	- Panel - -			• ·		
Parall Control teaching Control teaching <thcontrol teaching<="" th=""></thcontrol>						
Image:				•	•	
Source Source<		Viewing Angle(H/V)		178:178	178:178	
Social Special (Second Context) Relation Second Context (Second Context) Relation Second Context (Second Context) Interact Second Context (Second Context) Interact Second Context (Second Context) Second Context (Second Context) Second Context (Second Context) Interact Second Context (Second Context) Interact Second Context (Second Context) Second Context (Second Context) Second Context (Second Context) Interact Second Context (Second Context) Interact Second Context (Second Context) Second Context (Second Context) Second Context (Second Context) Interact Second Context (Second Context) Interact Second Context (Second Context) Second Context (Second Context) Second Context (Second Context) Interact Second Context (Second Context) Second Context (Second Context) Second Context (Second Context) Second Context (Second Context) Interact Second Context (Second Context) Second Context (Second Context) Second Context (Second Context) Second Context (Second Context) Interact Second Context (Second Context) Second Context (Second Context) Second Context (Second Context) Second Context (Second Context) Interact Second Context (Second Context) Second Context (Second Context) Second Context (Second Context) Second Context (Second Context)		Response Time(G-to-G)		6ms(Typ.)	6ms(Typ.)	
Note Note Note Note Note Note concentration 0.0007						
Bit International Processing Procespondered Processing Processing Processing Processing Processing	Sound			· · ·		
Number Numer Numer Numer <th rowspan="4"></th> <th></th> <th></th> <th></th> <th></th>						
Secure View SSS SSSS SSS SSSS SSS SSS SSS SSS SSSS SSSSS SSSSS SSSSS SSSSS SSSSS SSSSSS SSSSSS SSSSSS SSSSSSS SSSSSSSS SSSSSSSSSSSSSSSSSSSSSSSSSSSSSSSSSSSS		INPUT -				
Scene citrity State (U)(1)/1 (U)(1)						
Outcome Outcome Heads of an end of an an end of an an end of an an end of an an end of an						
Autoo Control Control Control Control Control Autoo Control Control<	Connectivity		VIDEO	N/A	N/A	
NTTERNAL SERIOR NA NA EXTERNAL CONTROL Extended Reading at Extended	-	OUTPUT –	AUDIO	1(Stereo Mini Jack)	1(Stereo Mini Jack)	
Entransmit Contribit Total mail Total mail Total mail 10/01 10						
Caliform		INTERNAL	SENSOR			
BTV/IT Yes (Repland/Rouse, Speind?) If and Restring Attract Intercent Interference Xtract Interference X		EXTERNAL	CONTROL			
Spin 1/8 <th></th> <th>BT/W</th> <th>/iFi</th> <th></th> <th></th>		BT/W	/iFi			
Att utilization **Whiteboording garwork 4 drawing **Whiteboording garwork 4 drawing boord Object Recognition Range Rank 4 mark 3 mm / Som Rank 4 mark 3 mm / Som boord Object Recognition Range Rank 4 mm / Som Rank 4 mm / Som boord Object Recognition Range Som Som boord Object Recognition Som Som boord Object Recognition Som Som boord The devices Som Som Som boord Market Som Som Som boord Additional Film Hadrines Som Som boord Som Som Som Som Som boord Som Som Som Som Som Som boord Som Som<						
Touch "Anti-Security approved a security" "Provider approved a security" "Proved Technologies Recognition" Touch Object Recognition Ramps Can Hom 2 security approved a security of the securi						
Object Reception Energy Zmin / Aminy / Sminy / Sminy Zmin / Aminy / Sminy / Sminy Torush Torush Bispace Time A miny / Sminy / Sminy Bispace / Sminy Densing Smite (Stubietscy) 2 miny / Sminy / Sminy Convert A miny / Sminy / Sminy Torush Torush 2 miny / Sminy / Sminy 2 miny / Sminy / Sminy Torush Torush 2 miny / Sminy / Sminy 2 miny / Sminy / Sminy Torush Torush 2 miny / Sminy / Sminy 2 miny / Sminy Torush Torush 2 miny / Sminy / Sminy 2 miny / Sminy Torush Torush 3 miny / Sminy 2 miny / Sminy Torush Torush 3 miny / Sminy 2 miny / Sminy Torush Torush 3 miny / Sminy 2 miny / Sminy Torush Torush 3 miny / Sminy 2 miny / Sminy Torush Torush 3 miny / Sminy 3 miny / Sminy Torush Torush 4 miny / Sminy / Sminy 3 miny / Sminy Torush Torush 3 miny / Sminy 3 miny / Sminy Torush Torush 3 min						
Couch Basel Recognition Bits Mode: Pyramic Object Recognition) Bits Mode: Pyramic Object Recognition) Touch Tourna Speed Floca Liter(y) Amic Amic Amic Harden Bits Mode: Pyramic Object Recognition) Bits Mode: Pyramic Object Recognition) Bits Mode: Pyramic Object Recognition) Harden Bits Mode: Pyramic Object Recognition) Amic Bits Mode: Pyramic Object Recognition) Harden Bits Mode: Pyramic Object Recognition) Amic Bits Mode: Pyramic Object Recognition) Harden Bits Mode: Pyramic Object Recognition) Amic Bits Mode: Pyramic Object Recognition) Harden Bits Mode: Pyramic Object Recognition) Amic Bits Mode: Pyramic Object Recognition) Harden Bits Mode: Pyramic Object Recognition) Amic Bits Mode: Pyramic Object Recognition) Harden Bits Mode: Pyramic Object Recognition) Mode: Pyramic Object Recognition) Mode: Pyramic Object Recognition) Prever Constantion Hydra Mode: Pyramic Object Recognition) Mode: Pyramic Object Recognition) Mode: Pyramic Object Recognition) Prever Constantion Hydra Mode: Pyramic Object Recognition) Mode: Pyramic Object Recognition) Mode: Pyramic Object Recog	- Touch -					
Build Hass Down Set Hass Down Set Set Hass Down Set Set Hass Down Set Set Hass Down Set Hass Down Set Hass Down Set Hass <thdown set<br="">Hass</thdown>						
Line Loss Addition Addition Hacknes S7 S7<				6.7ms	6.7ms	
Initializes 3.21 3.21 Herst Seint Strangfhored Gars Additional Film Herst Seint Strangfhored Gars Additional						
Hadness Headness						
Additional Film Additional Film Additional Film Additional Film Additional Film Power Type Type Type Film/Additional Film Hadronal Film Hadrona	-					
Additional Film Hydropholic Counsel PET (Shatter-proof Linn) Antimicrobial Counting Internal Molin Ro, 075 Feal Act00: 2400 X00002 Lipsting/bolic Counting PET (Shatter-proof Linn) Antimicrobial Counting Internal Molin Ro, 075 Feal Act00: 2400 X00002 Lipsting/bolic Counting PET (Shatter-proof Linn) Act00: 2400 X00002 Power Consumption Max WW/II Protection 430W (1000-2400 X, 100W (202-2400 X, 005T (10W (5A)) 3 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0						
Proce Type Internal (Main lag, DDS (ac)) Internal (Main lag, DDS (ac)) Power Singly Ada(M) Ada(W)				Hydrophobic Coated PET (Shatter-proof flim)	Hydrophobic Coated PET (Shatter-proof flim)	
Power Single MAC100 2409 (S00/bit) CAT00 2409 (S00/bit) CAT00 2409 (S00/bit) Power Consumption Partial (W1/bit) Fit S00/bit (W1/bit) Fit S00/bit (W1/bit) Fit S00/bit (W1/bit) Power Consumption Partial (W1/bit) Fit S00/bit (W1/bit) Fit S00/bit (W1/bit) Fit S00/bit (W1/bit) Power Consumption Power Consumption Power Consumption Fit S00/bit (W1/bit) Fit S00/bit (W1/bit) Power Consumption Power Consumption Power Consumption Fit S00/bit (W1/bit) Fit S00/bit (W1/bit) Power Consumption Power Consumption Power Consumption Fit S00/bit (W1/bit) Fit S00/bit (W1/bit) Power Consumption Power Consumption Power Consumption Fit S00/bit (W1/bit) Fit S00/bit (W1/bit) Power Consumption Power Consumption Power Consumption Fit S00/bit (W1/bit) Fit S00/bit (W1/bit) Fit S00/bit (W1/bit) Fit S00/bit (W1/bit) Power Consumption Power Consumption Fit S00/bit (W1/bit) Fit S00/bit (W1/bit) Fit S00/bit (W1/bit) Fit S00/bit (W1/bit) Power Consumption Power Consumption Power Consum (W1/bit) Fit S00/bit (W1/bit)					•	
Power Mod/Winh 473W100-2400, 459W1220-2400, 451W4250-2400, 458W045A) 528W100-2400, 450W120-2400,		Power Supply				
Power power (ansumption Restinguily) 150/W 150/W 150/W Performanipation Restinguily) Restinguily) 150/W072D-240V(), 055(14/V.5.h) 0.5 Stand-Sylv(Nh) 0.5 0.5 0.5 Bit UNIDD-240V() TS25W072D-240V(), 055(14/V.5.h) 1500.48V(10.5-20V(), 055(14/V.5.h) 0.5 Bit UNIDD-240V() TS25W072D-240V(), 055(14/V.5.h) 1500.48V(10.5-20V(), 055(14/V.5.h) 0.5 Bit UNIDD-240V() TS25W072D-240V(), 055(14/V.5.h) 1500.48V(10.5-20V(), 055(14/V.5.h) 0.5 Weight (kg) Set 995.187.9720 (Dist) 1500.48V(10.5-20V(), 055(14/V.5.h) 0.5 Color Set 995.187.9720 (Dist) 1500.48V(10.5-20V(), 055(14/V.5.h) 0.5 Metchanical Set 995.187.9720 (Dist) 1500.48V(10.5-20V(), 055(14/V.5.h) 0.5 Vectorial Color 995.187.9720 (Dist) 150.48V(10.5-20V() 157.518/1 (Dist) Metchanical Vectorial 995.187.9720 (Dist) 157.518/1 (Dist) 157.518/1 (Dist) Metchanical Vectorial 10.508 (Dist) 0.507 (Dist) 157.518/1 (Dist) 157.518/1 (Dist) Presection Glass <td></td> <td></td> <td></td>						
Image: solution of the stand-by/White stand-by/White of the stand-by/White of the stand	Power					
Image: space		Power Consumption Rating[W/h]		430W(100-240V), 410W(220-240V), OPS(16V/4.5A)	480W(100-240V), 460W(220-240V), OPS(16V4.5A)	
Set. 1724 x102.5 x 3 m / 2/3 x 40 4 x 5 3 m 1945.8 x1031 x 89 mm / 2/4 x 40 4 x 5 m Weight (kg) Set. 993 kg / 130 / 16 x 2156 x 138 x 20 mm / 2/4 x 40 4 x 5 m Weight (kg) Set. 993 kg / 130 / 16 x 916 x 138 x 20 mm / 2/4 x 40 x 4 3 m Methanical Package 72.2 kg / 1952 Lb 916 kg / 2019 lbs Color White gray White gray White gray VESA Mount 400 * 400 600 * 400 600 * 400 Portection Glass Ves Ves Ves State Tiple Weild Mount Wall Mount Wall Mount Portection Files Accessory Wall Mount Wail Mount Power Cable Length No / 24(US) SM / 24(US) SM / 24(US) Power Cable Length No / 24(US) SM / 24(US) SM / 24(US) Power Cable Length No / 24(US) SM / 24(US) SM / 24(US) Power Cable Length No / 24(US) SM / 24(US) SM / 24(US) Power Cable Length Landscape No / 24(US) SM / 24(US) Power Cad, US Uppert Uppert (25,UP)				0.5	0.5	
Buildingtion (mm) Parage Set 993 kg / 130 / 18s 2136 x 133 kg / 220 mm / 48 x 13 kg / 02 in 75 x 138 y / 22 mm / 75 x 46.8 xt 13 in 2136 x 138 kg / 220 mm / 48 x 13 kg / 02 in Mechanical Spec Color 993 kg / 130 / 18s 973 kg / 130 / 18s 973 kg / 130 / 18s Mechanical Spec Color White gray White gray White gray Mechanical Spec Potection Glass Ves Ves Ves Meda Player Option Type Option Sign option Relation Option Sign option Relation Option Sign option Relation Potection Glass Operation Power Cable Length Power Card, USB Upterson Cable Cable Pen/Cas, Black), OPS Box, Waranty QSG Power Card, USB Upterson Cable Cable Pen/Cas, Black), OPS Box, Waranty QSG Power Card, USB Upterson Cable Cable Pen/Cas, Black), OPS Box, Waranty QSG Power Card, USB Upterson Cable Cable Pen/Cas, Black), OPS Box, Waranty QSG Power Card, USB Upterson Cable Cable Pen/Cas, Black), OPS Box, Waranty QSG Power Card, USB Upterson Cable Cable Pen/Cas, Black), OPS Box, Power Card, USB Upterson Cable Cable Pen/Cas, Black), OPS Box, Built in Speaker (MAV CLI), Wint Module Embedded Filp S/W whitebacarding app) Touch Overlay(IR), Font Cameer Uw, DPS / Spean (Work) Spaar Touch Overlay(IR), Font Cameer Uw, DPS / Spaar (Work) Spaar Touch Overlay(IR), Font Cameer Uw, DPS / Spaar (Work) Spaar Touch Overlay(IR), Font Cameer Uw, DPS / Spaar <td></td> <td></td> <td></td> <td></td> <td></td>						
Jackage Tackage Tops x118 x 28/ mm / 5x 48, 811.01 2156 x138 x20 mm / 26 x138 x20 mm		Dimension (mm)				
Veright (kg) Package 72.2 kg/1952 lbs 91.6 kg/20.19 lbs Mechanical Spec Color White gray White gray White gray Protection Gass Ves Ves Ves Spec Netain Type Wall Mount Wall Mount Media Flager Option Type OPS Slit support OPS Slit support Media Flager Option Type OPS Slit support OPS Slit support Accessory Media Flager Option Type OPS Slit support Accessory Power Cod, USB Upterman Cable(2a), PenicRe, Black), OPS Box, Waranty/GSG Meranty/GSG Operation Humidity 10 - 80%, non-condensing Flip Ap Flip AP Flip Ap Flip AP Flip AP Full Full Spece OPC - 40°C OPC - 40°C Orientation Landscape Indecape Indecape Flip AP Flip AP Flip AP Flip AP Flip SV Flip AP Indecape Flip AP Immediation Landscape Indecape Slit Support Flip AP Flip AP Flip						
Color White gray White gray Mechanical Spec VESA Mount 400 * 400 600 * 400 Protection Glass Ves 600 * 400 Spec Stand Type Wall Mount Wall Mount Mechanical Spec Stand Type Wall Mount Wall Mount Mechanical Spec Mechanical Particip Wall Mount Wall Mount Mechanical Spec Rotation Relation Landscape only Wall Mount Power Carl USB Upstream Cable(2xa), Pen(2xa, Black), OPS Box, Waranty/QSG SM / 2 AM(US) Power Carl USB Upstream Cable(2xa), Pen(2xa, Black), OPS Box, Waranty/QSG Operation Humility 10 - 80%, non-condensing 10 - 80%, non-condensing Humility Touch Overlay(IR), Fort Connectivity, OPS IP SupportIW/OPS Box) Built in Speaker(40W 4CH), Wir/PII Module Embedded Flip S/W (Witeboarding apt) Built in Speaker(40W 4CH), Wir/PII Module Embedded Bilip Sind Witeboarding apt) Pour Carl USB Upstream Cable(2xa), Pen(2xa, Black), OPS Box, Built in Speaker(40W 4CH), Wir/PII Module Embedded Flip S/W (Witeboarding apt) Built in Speaker(40W 4CH), Wir/PII Module Embedded Flip S/W (Witeboarding apt) Pource Carl USB Upstream Cable(2xa), Pen(2xa, Black), OPS Box, Built in Speaker(40W 4CH), Wir/PII Module Embedded Flip S/W (Witeboarding apt) Built in Speaker		Weight (kg)		•		
Wechanical Spect VES Numerical Protection Glass Ves Wes 600 * 400 Wes Protection Glass Ves Ves Spect Ves Ves Mechanical Spect Media Player Option Type OPS Slot support OPS Slot support Mechanical Media Player Option Type OPS Slot support OPS Slot support Rotation Landscape only Landscape only Accessory Waranty/OSG OP Operation New Cord, USB Upstream Cable(Cap). Pen/Cap, Black), OPS Box, Built in Speaker(ADW CAF), WIF/RIM Module Embedded Filp SW (whiteboarding app) Power Cord, USB Upstream Cable(Cap). Pen/Cap, Black), OPS Box, Built in Speaker(ADW CAF), WIF/RIM Module Embedded Filp SW (whiteboarding app) Flip App Feature S/W First screen Document viewer SmartView+ Web browser Werkspace SmartView+ Web browser Werkspace SmartView+ Web browser Werkspace SmartView+ Web browser Werkspace Ves Internal Player (Embedded KWM Scraege Yes Yes Yes Anplay Ready updater (22.5) Ready updater (22.5) Ready updater (22.5) Internal Player (Embedded KWM Scraege Ves Yes Yes Accessories<		Colo			-	
Methalical Spec Protection Glass Yes Spec Stand Type Wall Mount Wall Mount Media Player Option Type OPS Sits support OPS Sits support Retation Landscape only Landscape only Power Cable Length Power Cord, USB Upstream Cable/Cabl, PenClae, Black), OPS Box, Waranty/OSG Power Cord, USB Upstream Cable/Cabl, PenClae, Black), OPS Box, Waranty/OSG Operation HumRty 10 - 80%, non-condensing 10 - 80%, non-condensing H/W Tou-Dover/app (Enconcentry) Tou-Dover/app (Enconcentry), OPS I/F Support/w/OPS Box, Built in Speaker(40W 4CH), WF/RT Module Embedded Tou-Dover/app (Enconcentry), OPS I/F Support/w/OPS Box) Feature First screen First screen Filp S/W (Whitebarding app) Filp App Feature S/W First screen Filp S/W (WriteBarding Embedded) Filp S/W (WriteBarding app) Filp S/W Web/RC Ves Smart/Verve Web/RC Ves (RDP/WC, Circl-S5, S/Ware) (RDP/WC, Circl-S5, S/Ware) Edu tool Landscape minioconnectIN America Only) minioconnectIN America Only) Built in Speaker(40W CH), WritePin Moulte Visp player					• .	
Keature Stand Type Wall Mount Wall Mount Media Player Opino Type OPS Sidt support 0PS Sidt support Rotation Landscape only Landscape only Rotation SM / Z AMUS) Power Code, USB Upstrem Cable(Zea), Pen(Zea, Black), OPS Box, Waranty/OSG Accessory Power Code, USB Upstrem Cable(Zea), Pen(Zea, Black), OPS Box, Waranty/OSG Power Code, USB Upstrem Cable(Zea), Pen(Zea, Black), OPS Box, Waranty/OSG Operation Humidity 10-80%, non-condensing 10-80%, non-condensing H/W Touch Overlay(IR), Front Connectivity, DPS I/F Support(WOPS Box) Power Code, USB Upstrem Cable(Zea) First Screen First Screen Touch Overlay(IR), Front Connectivity, DPS I/F Support(WOPS Box) Built in Speaker(GW 4CH), WFI/EIT Module Embedded Filip S/W (whiteboarding app) Document viewer Document viewer SmartView+ SmartView+ SmartView+ S/W Web trowser Workspace Workspace (RDP/VNC, Office355, VMWare) Edition Edition Lint Speaker(GW 4CH), WFI/EIT Module Embedded Filip S/W (whiteboarding app) Document viewer SmartView+ Video player Workspace				Yes	Yes	
Retation Landscape only Landscape only Power Cable Length 3M / 2.4 M(US) 3M / 2.4 M(US) Accessory Power Cord, USB Upterman Cable(2a), Pen(2a), Black), OPS Box, Waranty/CSG Power Cord, USB Upterman Cable(2a), Pen(2a), Black), OPS Box, Waranty/CSG Operation Humidity 10 - 80%, non-condensing 10 - 80%, non-condensing Image: Construction Non-condensing 10 - 80%, non-condensing 10 - 80%, non-condensing Image: Construction Non-condensing 10 - 80%, non-condensing 10 - 80%, non-condensing Image: Construction Non-condensing 10 - 80%, non-condensing 10 - 80%, non-condensing Image: Construction Non-condensing Image: Construction Image: Construction Image: Construction Filp App Construction Image: Construction Image: Construction Image: Construction Filp App <t< td=""><td></td><td colspan="2">Stand Type</td><td>Wall Mount</td><td>Wall Mount</td></t<>		Stand Type		Wall Mount	Wall Mount	
Power Cable Length SM / 2.4 MUS) SM / 2.4 MUS) Accessory Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSG Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSG Operation Operation OrC - 40°C O°C - 40°C Humidity 10 - 80%, non-condensing 10 - 80%, non-condensing Orientation Flip App Flip App Orientation Landscape Touch Overlay(IR), Front Connectivity, OPS IVF Support(w/OPS Box) Built in Speaker(40W 4CH), WirtPM Module Embedded Built in Speaker(40W 4CH), WirtPM Module Embedded First screen Document Viewer SimartView+ SimartView+ Video player Video player Video player Built in Speaker(40W 4CH), WirtPM Module Embedded Feature S/W Apps Morkspace Workspace Video player Video player Video player Video player Video player Workspace Workspace Workspace (DPJ/VIC, Offica355, VMWare) Edu tool Workspace Workspace SimartView+ Yes Yes Yes SimartView+ Yes Yes				OPS Slot support	OPS Slot support	
Accessory Power Cord, USB Upstream Cable(2ea, Black), OPS Box, Waranty/OSG Power Cord, USB Upstream Cable(2ea, Pen/2ea, Black), OPS Box, Waranty/OSG Operation Operating Temperature 0°C- 40°C 0°C- 40°C Humidity 10 - 80%, non-condensing 10 - 80%, non-condensing Very Filp App Filp App File App Orientation Landscape Landscape Landscape H//W Touch Overlay(IR), Front Connectivity, DPS I/F Support(w/OPS Box) Built in Speaker(40W ACH), WF/FIB Module Embedded Built in Speaker(40W ACH), WF/FIB Module Embedded Built in Speaker(40W ACH), WF/FIB Module Embedded Filp S/W (whiteboarding app) Touch Overlay(IR), Front Connectivity, OPS I/F Support Built in Speaker(40W ACH), WF/FIB Module Embedded Filp S/W (whiteboarding app) Document viewer SmartView+ View Pile App Feature S/W Apps (RDP/VNC, Office356, SVMWare) Evit to I Evit to I Web Browser Web Browser Yes Yes Yes Internal Player (Embedded H/W) WebRTC Yes Yes Yes Internal Player (Embedded H/W) Processor Cortex A217.0612 Quad-Core CPU 2MB L2 Sizerage Sizerage Internal Player (Embedded H/W) Froatesor Cortex A217.0612 Q					. ,	
Accessories Accessories Marantry/QSG Warantry/QSG Warantry/QSG Operation Operating Temperature 0°C + 40°C 0°C + 40°C Operation Humidity 10 - 80%, non-condensing 10 - 80%, non-condensing Orientation Landscape Landscape Landscape Orientation Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker (40W 4CH), WirF/BTM Module Embedded Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker (40W 4CH), WirF/BTM Module Embedded First screen First screen Document viewer SmartView+ Video player Video player Video player Video player Video player Workspace Workspace Workspace Vegentation Vegentation First screen Yes S/W Webrowser Workspace Workspace Workspace Workspace Yes Yes Internal Player Platform Pontus-M (Taten 6.5) Pontus-M (Taten 6.5) Internal Player Processor Cortex A72 176Hz Quad-Core CPU 2MB L2 Cortex A72 17.6Hz Quad-Core CPU 2MB L2		Power Cable Length				
Operation Operating Temperature 0%C - 40%C 0%C - 40%C Operation Humidity 10 - 80%, non-condensing 10 - 80%, non-condensing Key Flip App Stip App Stip App Orientation Landscape Landscape H/W Touch Overlay(IR), Front Connectivity, OPS I/F Support(W/OPS Box) Built in Speaker(40W 4CH), WiF/RI Module Embedded Fist screen First screen First screen Document viewer South Viewer SMW First screen Document viewer South Viewer Built in Speaker(40W 4CH), WiF/RI Module Embedded Feature First screen First screen Document viewer South Viewer Apps Workspace Workspace Workspace Workspace Workspace Workspace Workspace Workspace Upgradable web engine Yes Yes Yes Simart View* Yes Yes Yes Internal Player (Embedded H/W) Platform Pontus-M (Tizen 6.5) Pontus-M (Tizen 6.5) Internal Player (Embedded H/W) Storage 32268 (2.656 D Accupied by	Operation	Accessory				
Humadry 10 - 80%, non-condensing 10 - 80%, non-condensing Key Flip App Flip App Orientation Landscape Landscape H/W Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WF/FIM Module Embedded Flip S/W (whiteboarding app) Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WF/FIM Module Embedded Flip S/W (whiteboarding app) Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WF/FIM Module Embedded Flip S/W (whiteboarding app) Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WF/FIM Module Embedded Flip S/W (whiteboarding app) Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WF/FIM Module Embedded Flip S/W (whiteboarding app) Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WF/FIM Module Embedded Flip S/W (whiteboarding app) Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WF/FIM Module Embedded Flip S/W (whiteboarding app) Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WF/FIM Module Embedded Flip S/W (whiteboarding app) Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WF/FIM Module Embedded Flip S/W (whiteboarding app) Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WF/FIM Module Embedded Flip S/W Feature S/W <t< td=""><td colspan="2">Operating Temperature</td><td></td><td></td></t<>		Operating Temperature				
Image: base in the stand scape Landscape Landscape Image: base in the stand scape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiF/BT Module Embedded Image: base in the stand scape First screen First screen Document viewer Image: base in the stand scape First screen Document viewer SmartView+ Image: base in the stand scape First screen Document viewer SmartView+ Image: base in the stand scape Document viewer SmartView+ Video player Image: base in the stand scape Morkspace Workspace Workspace Image: base in the stand scape Morkspace Workspace Workspace Image: base in the stand scape Yes Yes Yes Image: base in the stand scape Yes Yes Yes Internal Player Processor Yes Yes Yes Internal Player Processor Yes Stand Yes Yes Internal Player Processor Cortex X72176H2 Quad-Core CPU 2MB L2 Cortex X72176H2 Quad-Core CPU 2MB L2 Stand Yes	Operation -			10 ~ 80%, non-condensing	10 ~ 80%, non-condensing	
Feature S/W Touch Overlay(IR), Front Connectivity, DPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WIF/I/BT Module Embedded Touch Overlay(IR), Front Connectivity, DPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WIF/I/BT Module Embedded Feature First screen Filp S/W (whiteboarding app) Built in Speaker(40W 4CH), WIF/I/BT Module Embedded Built in Speaker(40W 4CH), WIF/I/BT Module Embedded Feature S/W First screen Document viewer SmartView+ Apps Workspace Workspace Workspace Workspace Workspace Workspace Workspace Upgradable web engine Yes Yes Yes Video player Yes Yes Yes Internal Player Platform Yes Yes Processor Cortex A72176Hz Quad-Core CPU 2MB L2 Cortex A72176Hz Quad-Core CPU 2MB L2 Storage 32GB (2.65GB Occupied by O/S, 29.35GB Available) 32GB (2.65GB Occupied by O/S, 29.35GB Available) Security Storage 32GB (2.65GB Occupied by O/S, 29.35GB Available) 32GB (2.65GB Occupied by O/S, 29.35GB Available) Security Storage 32GB (2.65GB Occupied by O/S, 29.35GB Available) 32GB (2.65GB Occupied b						
Feature First screen						
Feature First screen Flip S/W (whiteboarding app) Flip S/W (whiteboarding app) Feature First screen Document viewer Document viewer SmartView+ SmartView+ SmartView+ Video player Web browser Web browser Web browser Workspace Workspace (RDP/VNC, Office365, VMWare) Edu tool Edu tool Edu tool minioconnect(N.America Only) minioconnect(N.America Only) WebRTC Yes Yes Upgradable web engine Yes Yes Internal Player (Embedded H/W) Platform Pontus-M (Tizen 6.5) Pontus-M (Tizen 6.5) Processor Cortex A72176Hz Quad-Core CPU 2MB L2 Cortex A72176Hz Quad-Core CPU 2MB L2 Cortex A72176Hz Quad-Core CPU 2MB L2 Storage 32GB (2.65GB Occupied by 0/S, 29.35GB Available) 32GB (2.65GB Occupied by 0/S, 29.35GB Available) 32GB (2.65GB Occupied by 0/S, 29.35GB Available) Vecessor Cortex A72176Hz Quad-Core CPU 2MB L2 Cortex A72176Hz Quad-Core CPU 2MB L2 Cortex A72176Hz Quad-Core CPU 2MB L2 Vecessor Storage 32GB (2.65GB Occupied by 0/S, 29.35GB Available) 32GB (2.65GB Occupied b		H/V	N			
Feature S/W Apps SmartView+ Vide player Workspace Workspace (RDP/VK, Office365, VMWare) Edu tool SmartView+ Vide player Workspace (RDP/VK, Office365, VMWare) Edu tool Feature S/W WebRTC (RDP/VK, Office365, VMWare) Edu tool (RDP/VK, Office365, VMWare) Edu tool WebRTC WebRTC Yes (RDP/VK, Office365, VMWare) Edu tool Upgradable web engine Yes 748 Vegradable web engine Yes Yes SmartView+ Yes Yes Internal Player (Embedded H/W) Processor Cortex A7217GHz Quad-Core CPU 2MB L2 Storage 32GB (2.65GB Occupied by O/S, 29.35GB Available) 32GB (2.65GB Occupied by O/S, 29.35GB Available) Storage 32GB (2.65GB Occupied by O/S, 29.35GB Available) 32GB (2.65GB Occupied by O/S, 29.35GB Available) Accessorie Inctu-ds Power Cord, USB Upstream Cable(1ea), Pent2es, PEAP-TLS, EAP-TLS, E		First screen				
Feature S/W Apps Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool Video player Web browser Workspace (RDP/VNC, Office365, VMWare) Edu tool Web RTC WebRTC (RDP/VNC, Office365, VMWare) Edu tool (RDP/VNC, Office365, VMWare) Edu tool Web RTC Ves (RDP/VNC, Office365, VMWare) Edu tool (RDP/VNC, Office365, VMWare) Edu tool WebRTC Ves (RDP/VNC, Office365, VMWare) Edu tool (RDP/VNC, Office365, VMWare) Edu tool Implay WebRTC Yes (RDP/VNC, Office365, VMWare) Edu tool (RDP/VNC, Office365, VMWare) Edu tool Implay WebRTC Yes Yes Yes Implay Processor Yes Yes Platform Pontus-M (Tizen 6.5) Pontus-M (Tizen 6.5) Pontus-M (Tizen 6.5) Processor Cortex A721.7GHz Quad-Core CPU 2MB L2 Cortex A721.7GHz Quad-Core CPU 2MB L2 Yes Ver Cord, USB Upstram Cable(26), GB Occupied by O/S, 29.35GB Available) 32GB (2.65GB Occupied by O/S, 29.35GB Available) 32GB (2.65GB Occupied by O/S, 29.35GB Available) Internal Player N/A (Srd party company stand can be supported tor OSU Upstram Cable(26), Panctyce) Stand N/A (Srd party company stand can be supported through VES		S/W 				
Feature Apps Web browser Workspace (RDP/NC, Office365, VMWare) Web browser Workspace (RDP/NC, Office365, VMWare) Feature S/W	Feature -					
Feature S/W WebRTC WebRTC (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N.America Only) (RDP/VNC, Office365, VMWare) Edu tool mimioconnect(N.America Only) WebRTC WebRTC Yes Edu tool mimioconnect(N.America Only) Upgradable web engine Ves Yes SmartView+ Yes Yes SmartView+ Yes Yes Internal Player (Embedded H/W) Platform Pontus-M (Tizen 6.5) Pontus-M (Tizen 6.5) Processor Cortex A721.7GHz Quad-Core CPU 2MB L2 Cortex A721.7GHz Quad-Core CPU 2MB L2 Cortex A721.7GHz Quad-Core CPU 2MB L2 Operiating System Tizen 6.5 : Samsung Proprietary OS(VDLinux) 32GB (2.65GB Occupied by O/S, 29.35GB Available) 32GB (2.65GB Occupied by O/S, 29.35GB Available) Operiating System Tizen 6.5 : Samsung Proprietary OS(VDLinux) Tizen 6.5 : Samsung Proprietary OS(VDLinux) Accessories Include Power Cord, USB Upstream Cable(1ea), Pen(2ea), Warantty/QSG Power Cord, USB Upstream Cable(1ea), Pen(2ea), Warantty/QSG Optional Mount WMN6575SE N/A (3rd party company stand can be supported through VESA) N/A (3rd party company stand can be supported through VESA)			Apps	Web browser	Web browser	
Feature S/W Edu tool mimioconnect(N.America Only) Edu tool mimioconnect(N.America Only) WebRTC WebRTC Yes Yes Upgradable web engine Ves Yes SmartView+ Yes Yes SmartView+ Yes Yes Internal Player Platform Pontus-M (Tizen 6.5) Internal Player Processor Cortex A72.17.GHz Quad-Core CPU 2MB L2 Cortex A72.17.GHz Quad-Core CPU 2MB L2 Operating System Tizen 6.5: Samsung Proprietary OS(VDLinux) Tizen 6.5: Samsung Proprietary OS(VDLinux) Ves Security 802.1x(WPA2 Enterprise): EAP-TLS, EAP-TELS,						
WebRTC WebRTC Yes Yes Upgradable web engine Upgradable web engine Yes Yes SmartView+ Yes Yes Yes Airplay Ready to update (22.5) Ready to update (22.5) Internal Player (Embedded H/W) Platform Pontus-M (Tizen 6.5) Pontus-M (Tizen 6.5) Yes Storage 32GB (2.65GB Occupied by 0/S, 29.35GB Available) 32GB (2.65GB Occupied by 0/S, 29.35GB Available) Yes Operating System Tizen 6.5 : Samsung Proprietary OS(VDLinux) Tizen 6.5 : Samsung Proprietary OS(VDLinux) Xecessories Included Power Cord, USB Upstream Cable(tea), Pen(Zea), Waranty/QSG Power Cord, USB Upstream Cable(tea), Pen(Zea), Waranty/QSG Accessories Stand N/A (3rd party company stand can be supported through VESA) N/A (3rd party company stand can be supported through VESA)						
Upgradable web engine Ves Yes SmartView+ Yes Yes SmartView+ Yes Yes Airplay Ready to update (22.5) Ready to update (22.5) Platform Pontus-M (Tizen 6.5) Pontus-M (Tizen 6.5) Internal Player (Embedded H/W) Processor Cortex A72.1.7GHz Quad-Core CPU 2MB L2 Cortex A72.1.7GHz Quad-Core CPU 2MB L2 Operating System Tizen 6.5 : Samsung Proprietary OS(VDLinux) Storage 32GB (2.65GB Occupied by 0/S, 29.35GB Available) 32GB (2.65GB Occupied by 0/S, 29.35GB Available) Operating System Tizen 6.5 : Samsung Proprietary OS(VDLinux) Tizen 6.5 : Samsung Proprietary OS(VDLinux) Accessories Include Power Cord, USB Upstream Cable(1ea), Pen(2ea), Waranty/QSG Power Cord, USB Upstream Cable(1ea), Pen(2ea), Waranty/QSG Optional Mount WMN6575SE N/A (3rd party company stand can be supported through VESA) N/A (3rd party company stand can be supported through VESA)			IN LOTE		-	
Image: Provide the stand of the st						
Internal Player (Embedded H/W) Platform Pontus-M (Tizen 6.5) Pontus-M (Tizen 6.5) V Processor Cortex A721.7GHz Quad-Core CPU 2MB L2 Cortex A721.7GHz Quad-Core CPU 2MB L2 Storage 32GB (2.65GB Occupied by 0/S, 29.35GB Available) 32GB (2.65GB Occupied by 0/S, 29.35GB Available) Operating System Tizen 6.5 : Samsung Proprietary OS(VDLinux) Tizen 6.5 : Samsung Proprietary OS(VDLinux) Security 802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TLS				Yes	Yes	
Internal Player (Embedded H/W) Platform Pontus-M (Tizen 6.5) Pontus-M (Tizen 6.5) V Processor Cortex A721.7GHz Quad-Core CPU 2MB L2 Cortex A721.7GHz Quad-Core CPU 2MB L2 Storage 32GB (2.65GB Occupied by 0/S, 29.35GB Available) 32GB (2.65GB Occupied by 0/S, 29.35GB Available) Operating System Tizen 6.5 : Samsung Proprietary OS(VDLinux) Tizen 6.5 : Samsung Proprietary OS(VDLinux) Security 802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TLS, EAP-PEAP 802.1x(WPA2 Enterprise) : EAP-TLS,						
Internal Player (Embedded H/W) Processor Cortex A721.7GHz Quad-Core CPU 2MB L2 Cortex A721.7GHz Quad-Core CPU 2MB L2 Storage 32GB (2.65GB Occupied by 0/S, 29.35GB Available) 32GB (2.65GB Occupied by 0/S, 29.35GB Available) 32GB (2.65GB Occupied by 0/S, 29.35GB Available) Operating System Tizen 6.5 : Samsung Proprietary OS(VDLinux) Tizen 6.5 : Samsung Proprietary OS(VDLinux) Security 802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TELS, EAP-PEAP 802.1x(WPA2 Enterprise) : EAP-TLS, EAP-PEAP Accessories Included Power Cord, USB Upstream Cable(1ea), Pen(2ea), Waranty/QSG Power Cord, USB Upstream Cable(1ea), Pen(2ea), Waranty/QSG Accessories Optional Mount WMN6575SE WMN8200SF					· ·	
Image: Centre of the security Storage 32GB (2.65GB Occupied by 0/S, 29.35GB Available) 32GB (2.65GB Occupied by 0/S, 29.35GB Available) Image: Operating System Tizen 6.5 : Samsung Proprietary OS(VDLinux) Tizen 6.5 : Samsung Proprietary OS(VDLinux) Image: Operating System Tizen 6.5 : Samsung Proprietary OS(VDLinux) Tizen 6.5 : Samsung Proprietary OS(VDLinux) Image: Operating System 802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TELS, EAP-PEAP 802.1x(WPA2 Enterprise) : EAP-TLS, EAP-PEAP Image: Operating System Power Cord, USB Upstream Cable(1ea), Pen(2ea), Waranty/QSG Power Cord, USB Upstream Cable(1ea), Pen(2ea), Waranty/QSG Accessories Stand N/A (3rd party company stand can be supported through VESA) N/A (3rd party company stand can be supported through VESA) Optional Mount WMN6575SE WMN8200SF		Internal Player				
Image: Constraint of the security Operating System Tizen 6.5 : Samsung Proprietary OS(VDLinux) Tizen 6.5 : Samsung Proprietary OS(VDLinux) Image: Constraint of the security Security 802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TELS, EAP-PEAP 802.1x(WPA2 Enterprise) : EAP-TLS, EAP-PEAP Image: Constraint of the security Power Cord, USB Upstream Cable(1ea), Pen(2ea), Waranty/QSG Power Cord, USB Upstream Cable(1ea), Pen(2ea), Waranty/QSG Accessories Stand N/A (3rd party company stand can be supported through VESA) N/A (3rd party company stand can be supported through VESA) Optional Mount WMN6575SE WMN8200SF						
Security 802.1x(WPA2 Enterprise): EAP-TLS, EAP-TLS, EAP-PEAP 802.1x(WPA2 Enterprise): EAP-TLS, EAP-PEAP Accessories Included Power Cord, USB Upstream Cable(1ea), Pen(2ea), Waranty/QSG Power Cord, USB Upstream Cable(1ea), Pen(2ea), Waranty/QSG Accessories Stand N/A (3rd party company stand can be supported through VESA) N/A (3rd party company stand can be supported through VESA) Mount WMN6575SE WMN8200SF						
Included Power Cord, USB Upstream Cable(1ea), Pen(2ea), Waranty/QSG Power Cord, USB Upstream Cable(1ea), Pen(2ea), Waranty/QSG Accessories Stand N/A (3rd party company stand can be supported through VESA) N/A (3rd party company stand can be supported through VESA) N/A (3rd party company stand can be supported through VESA) N/A (3rd party company stand can be supported through VESA) N/A (3rd party company stand can be supported through VESA) WMN8200SF		Security				
Accessories Optional Mount WMN6575SE WMN8200SF			ded			
Optional Mount WMN65/55E WMN82005F	Accessories		Stand	N/A (3rd party company stand can be supported through VESA)	N/A (3rd party company stand can be supported through VESA)	
OPS Box CY-PBRK200 CY-PBRK200	Accessones	Optional				
3rd party compatibility Logitech RallyBar Plus Logitech RallyBar Plus		3rd party compatibilit	y	Logitech KallyBar Plus	Logitech RallyBar Plus	

SAMSUNG

Learn More Contact NEWCOM, trusted Gold EDU Strategic Partner of Samsung at 781-826-7989 or at sales@newcomglobal.com. NEWCOMGlobal.com



©2022 Samsung Electronics America, Inc. Samsung is a registered mark of Samsung Electronics Corp., Ltd. Specifications and design are subject to change without notice. Non-metric weights and measurements are approximate. Simulated screen images. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective manufacturers and companies. See samsung. com for detailed information. Printed in USA. DIGSIG-WMBBROCH-JUNE22TK